


Model	GSV 40+	GSV 58
Capacity	40 / 44 m ³	58 m ³
Total size (LxWxH)	8.8 x 2.5 x 3.9 m	11.2 x 2.5 x 3.9 m
Axles load, Emty	5.800 kg	8.800 kg
Towing eye load, Emty	500 kg	2.200 kg
Total weight, Emty	6.300 kg	11.000 kg
Axles Load, Max.	18.000 kg	24.000 kg
Towing eye load, Max.	2.570 kg	4.800 kg
Total wight	20.570 kg	28.800 kg
Load capacity	14.270 kg	17.800 kg
Suspended pully	Standard, Hydraulic	Standard, Hydraulic
Axle distance	1.500 mm	-
Axles / turnable Aksels dimension - Nav	2 / 1 130x130mm -10 hole	3 / 2 Cidra - 10 hole
Chassis	Suspended bogie	Hydraulic tridem
Moveable chassis	Standard	-
Std. Wheel type	600/55 - R22.5"	620/55 - R26.5"
Deep tailgate	Extra	Extra
Hydraulically tiltable front-gate	Standard	Standard
Fork-controlled swivel shaft	Extra	2 stk. is standard
Ball coupling	Extra	Extra
Other tires options	Ask	Ask
Hydraulic support-foot	Standard	Standard
Back light and Working light	Standard	Standard
LED side marker	Standard	Standard
	 GSV Leaflet	 GSV Video



TIM - Danish trailers in Danish quality..!

For several years, Thyregod has provided Danish and international customers with a large variety of trailers. We always work in close contact with the enduser in order to ensure developing top-grade products.

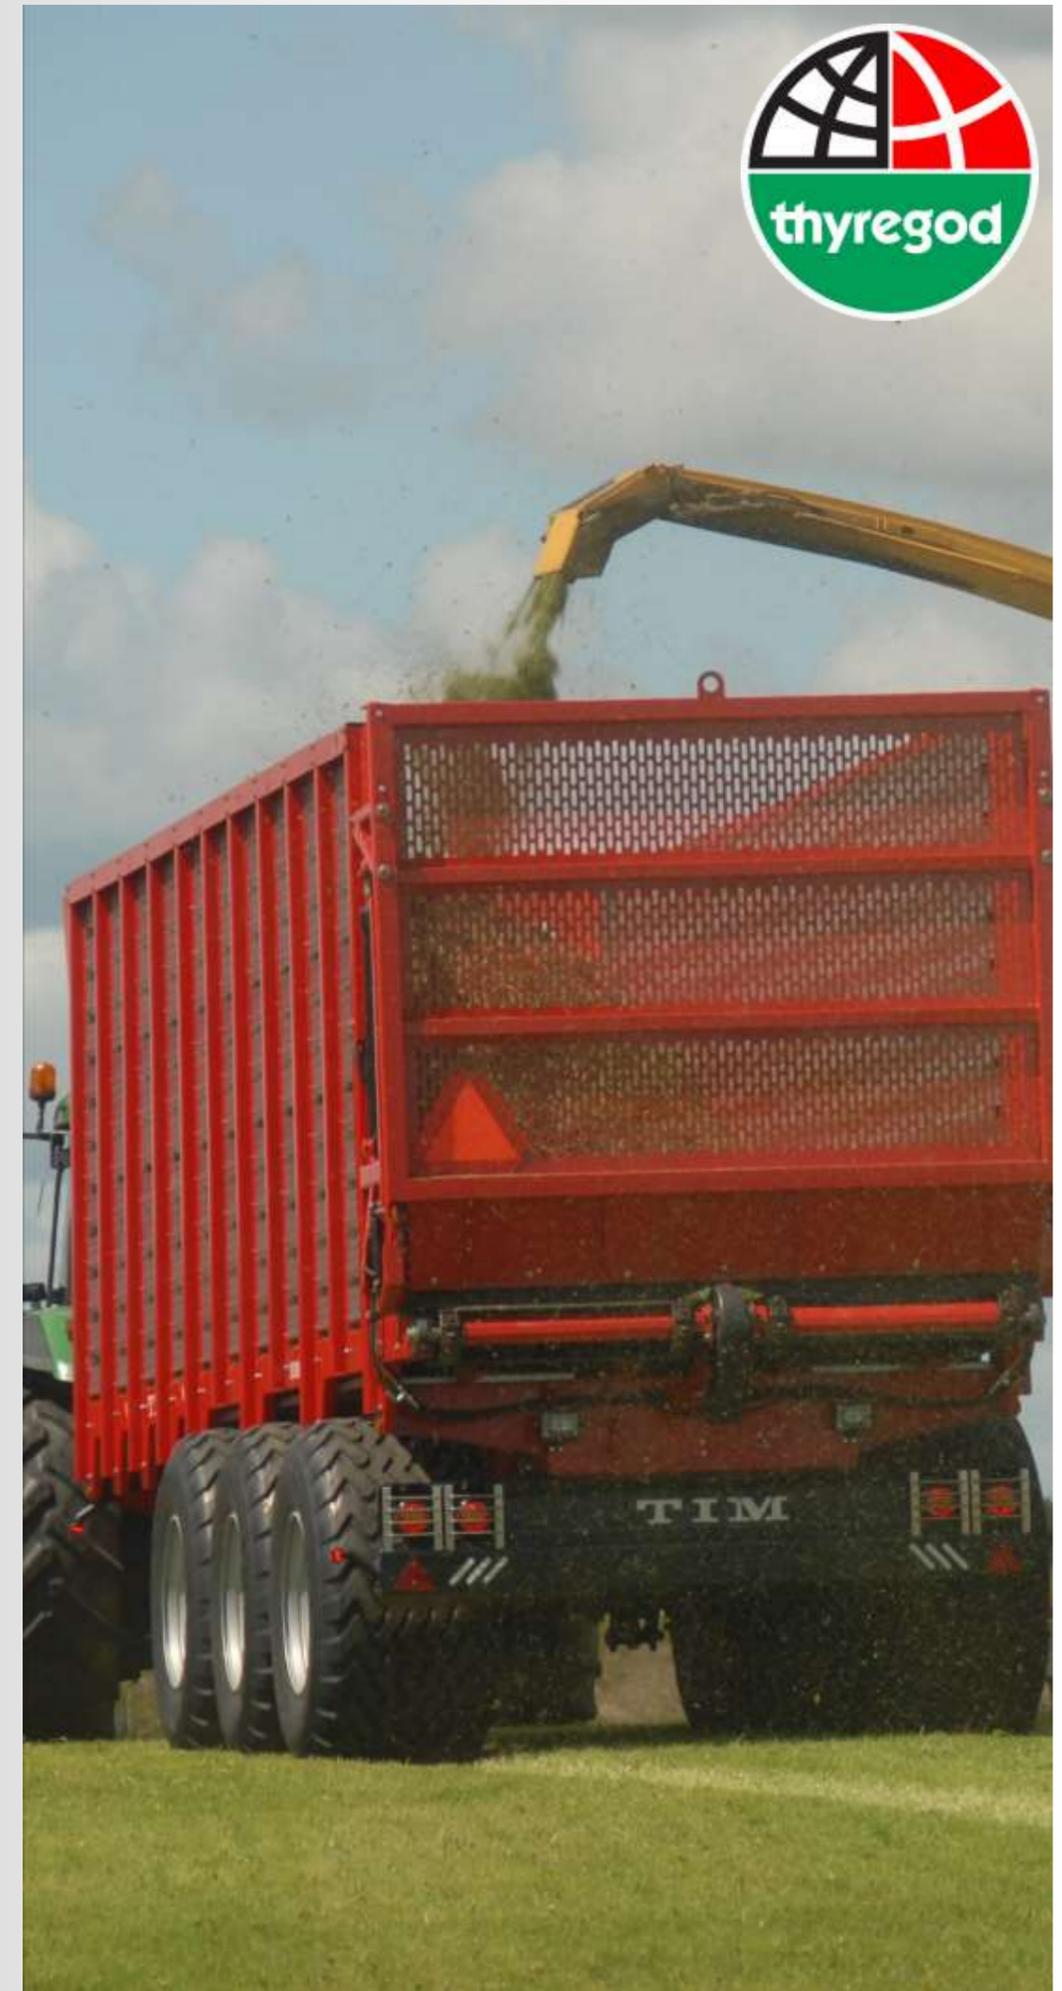

GSV 58 - Hydraulic tridem

GSV58 is equipped with fully hydraulically chassis. The front- and back warded axles is force controlled and the front warded axle can be adjusted in height. The height of the trailer can be adjusted individually sideays and the force-control can be used manually. 620/55-R26.5 tires is standard on the GSV58.



GSV 40+ Suspended bogie

GSV40+ is equipped with bogie-axes, where the back warded tires is follow-steered and lockable. The chassis can manually be adjusted in the direction of driving to customize the weight on pully. 600/55-R22.5 tires is standard. 710/50-R26.5 is option.



Fast unloading

The 80mm loading platform is conical and the tiltable front gate is ensuring problem free unloading. With upgraded oil-motors and 70mm axles ensure enough power for the unloading. Hydsrallycally locking system on the tailgate is standard on GSV58.



Simpel transmission

The unloading is handled by 2 Kohlswa 74 conveyor chain. The chain is driven by the center located transmission. The GSV trailers is equipped with hydraulically bumpers with upward system, which is automatically working together with the tailgate..



High visibility

Backlight, marking lights and position light is all of the type LED. LED is known for longer live of living and more visibility in the trafic. The GSV trailers is equipped with workinglight inside the trailers, on the frontgate and as reversing llight. All this is to secure the long days!



Strong genes.

All the chassis is build on 6mm high strength steel. This is giving the well-known strength and lower weight. The GSV trailers is equipped with strong twin-working hydraulic support-legs on the suspended pully. The pully is adjustable in height.



Extra capacity

The GSV trailers is equipped with hydraulically frontgate witch is tilting inside the trailer when unloading.Both trailers can be delivered with an deep tailgate witch increase the capacity by 3m³. The GSV40+ can be delivered with elevation sites witch increase the capacity by 3m³.

