



MULTIMIXER



**Movable multimixer
for slurry tanks**

MULTIMIXER

The Kimadan Multimixer is a highly effective agitator for machine pools and large-scale agriculture.

The Multimixer offers strength and output higher than any other mechanical mixer on the market. It is as flexible as a hydraulic mixer.

The mixer arm can be swung over the tractor cab and secured in a fitting to give safe and stable transport.




Since during operation the arm can be swung from side to side, there is no need to move the whole Multimixer to find the optimum position in relation to the tank.

The agitator section at the end of the arm can be moved a total of 65°. This gives an optimum forward screw effect (see sketch).

SPECIFICATION

Power requirement:	120 hp
PTO:	1000 r/min
Propeller diameter:	600 mm
Mixer arm length:	6200 mm
Mixer arm reach below ground level:	1200 mm
Angle, outer section:	65° (40° above arm, 25° below arm)
Mixer arm:	4° above horizontal 50° below horizontal)
Weight:	1320 kg Max.
tank clearance above ground level:	3100 mm

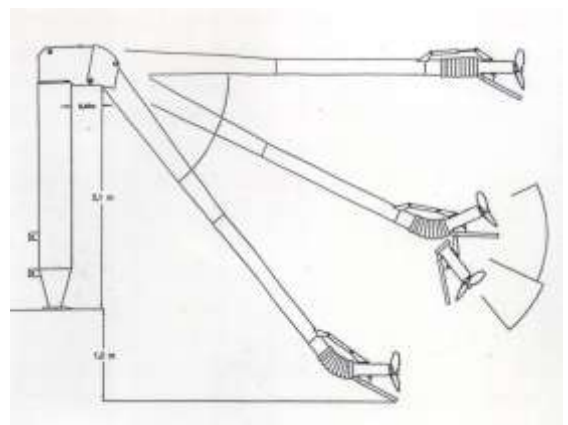

Thyregod A/S

Borgergade 46

Thyregod

DK-7523 Give

Telefon +45 7573 4099

Fax. +45 7573 4492

E-mail:

thyregod@thyregod.com

www.thyregod.com