

Thyregod tractor brush

Technical data for TK-2300:


- Total width 2.300—3,300 mm
- Working width 2.000—2,700 mm
- Length 1.340 mm
- Height 1.050 mm
- Brush diameter 600 mm
- Wheels 2
- Tyres Ø235 x 70
- Weight 250 kg.
- Brush standard with nylon
- Transmission, - optional mechanical or hydraulic

Extras:

- Hydraulic kit
- Screen
- ½ steel + ½ nylon brushes



Thyregod's tractor brush can be mounted on either a 3 point linkage or front linkage as the direction of brush rotation can be changed very easily by turning the gear box around (180 °)

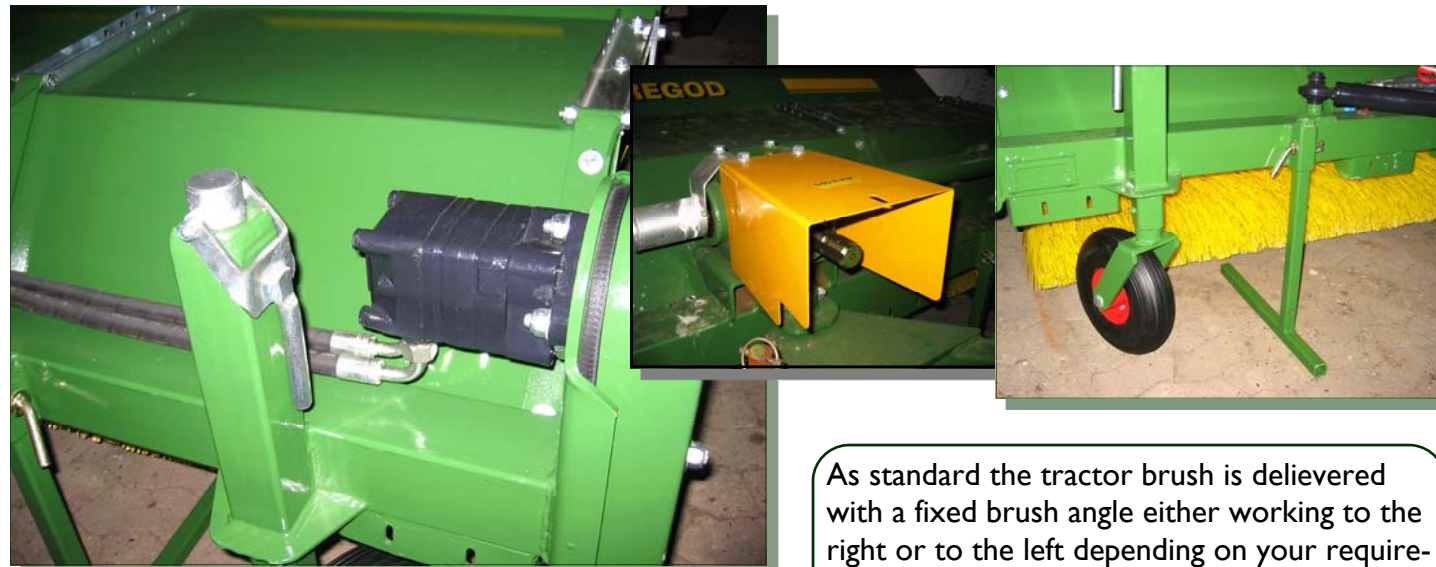

As standard the tractor brush is delivered with a fixed brush angle either working to the right or to the left depending on your requirement. As an optional extra a hydraulic kit can be supplied to change from right to left or vice versa. The kit requires a double acting spool valve on the tractor. Stay legs, that protect the brushes when the tractor brush is disconnected, are standard.

Transmission:

Transmission is mechanical driven from the tractor PTO or optional driven from the tractor hydraulics. The latter oil requirement is 60 litre/min.



Thyregod A/S

Borgergade 46
Thyregod
7323 Give
Tlf.: +45 75 73 40 99
Fax: +45 75 73 44 92
www.thyregod.com
thyregod@thyregod.com

Dealer:

Tractor brush, TK-2300 TK-3300

