



Specifications	TR 9
Weight	7.200 Kg
Length	10.75 m
Width in transport	3.00 m
Height in transport	3.90 m
Loading height, hopper	2.50 m
Unloading height	Max. 5.50 m
Elevator reach	7.90 m
Cleaning table clearance	1.70 m
Hopper volume	10 m <sup>3</sup>
Hopper, Length x Width	3.80 x 3.10 m
Loading capacity	Up to 300 ton/h
Wheels	650/65-R30.5
Cleaning tables	<p><b>1st. cleaning table</b>                      Feeder roller from hopper                      6 Rubber rollers                      3 steel rollers, reversing and sprung                      Over web pulls beet forward on table                      Over web with hydraulic direct drive                      Direction on steel rollers automatic changes, if they get blocked.</p> <p>Direction on each steel roller can be changed by remote, choosing between high beet flow or intensive cleaning.</p> <p><b>2nd cleaning table</b>                      6 steel rollers each 2000mm</p>
Standard Equipment	24 volt electrical system Hydraulic transmission, 4 pump Central lubrication Remote controlled functions with 3 remotes Free choice of drawbar hitch Distributer roll from hopper to cleaning table Turbocharged diesel engine with 78kw/105hp, Tier 3 500 ltr fuel tank Plastic catchers on loading elevator Mechanical "reverse-brake" on loading elevator Front- and rear support leg Rotating beacon, warning and work lights
Optional Equipment	Hydraulic brakes Pneumatic brakes



*- with total economy in focus !!*

# Combining high capacity and gentle cleaning...

Thyregod has for many years developed and produced cleaner loaders. The vast experience the company has received in this area, has now been migrated to the new Thyregod TR 9.

The result is a machine with a previously unattained high capacity, yet it is combined with the gentle cleaning, that has made the Thyregod cleaner loaders so well known.



## From transport to loading in no time

With all functions remote controlled, the transformation from transport to loading takes virtually no time. Moving the cleaner when loading, is also done from the drivers seat. High speed tires ensures fast travelling, when on the road between loading points.



## High capacity - Long reach

The new loading elevator are extended 1000mm, and are now 900mm wide. It also reaches further in under the steel roller table. This gives a reach of even when loading in high trailers.




## Remote controlled

All machine functions are controlled with remotes, and can also be controlled manually if needed. As standard the machine is supplied with 3 remote controls.

## Easy service


The engine is placed low on the side for easy access. Automatic lubrication is standard on the TR-9.

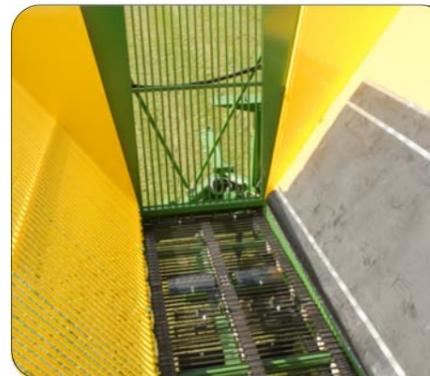

## Wide hopper

The TR-9 are fitted with a 10m<sup>3</sup> hopper, which gives the operator a good buffer when loading larger trailers.

The hopper is fitted with a 3 rubber-belt web with heavy carriers and built-in stone release. The hopper can be folded in by remote, for transport.

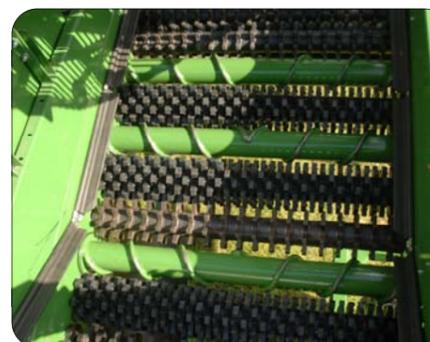

## High cleaning capacity

1st. Cleaning table with rubber rollers and 3 reversing spring loaded steel rollers.

The web over the rollers pulls the beet over the reversing rollers. *Note! The steel rollers reverses automatically when a stone get stuck between rollers.*

2nd. Cleaning table is fitted with 6 2m steel rollers.



## Stabilizers

Big hydraulic st stabilizers both front and rear, ensures the stability of the TR 9 when working.

## Stable adjustment

The new wider and longer loading elevator, moves smoother due to double yaw cylinders and strengthened turning points with heavier axles.



## Safe loading

The TR-9 elevator is now 900 mm width and fitted with plastic catchers for lower weight and easy replacement. The outer 2.5m of the elevator can be individual height adjusted for perfect delivery of beet in the trailer. The TR-9 elevator is fitted with LED work- and warning lights in both directions for safety and easy loading, during the dark hours.

