


155/85



Specifications	155 / 85
Loading capacity	15.500 Kg
Volume (With grain sides)	8,7m <sup>3</sup> (17m <sup>3</sup> )
Weight	5.310 Kg
Body size, LxWxH	5.5 x 2.35 x 0.75 m
Total size, LxWxH	6.85 x 2.55 x 2.2 m
Sprung drawbar	Yes
Body thickness	Bottom 10mm Domex Sides 8mm Domex
Tipping angle	63°
Undercarriage	Bogie / Leaf springs
Brakes	Hydraulic on both axles
Tyres	445/65-R22.5"
Standard	French type tailgate Height adjustable drawbar Bumper Traffic lights - LED
Optional equipment	Grain extension sides Norwegian type tailgate Pneumatic brakes

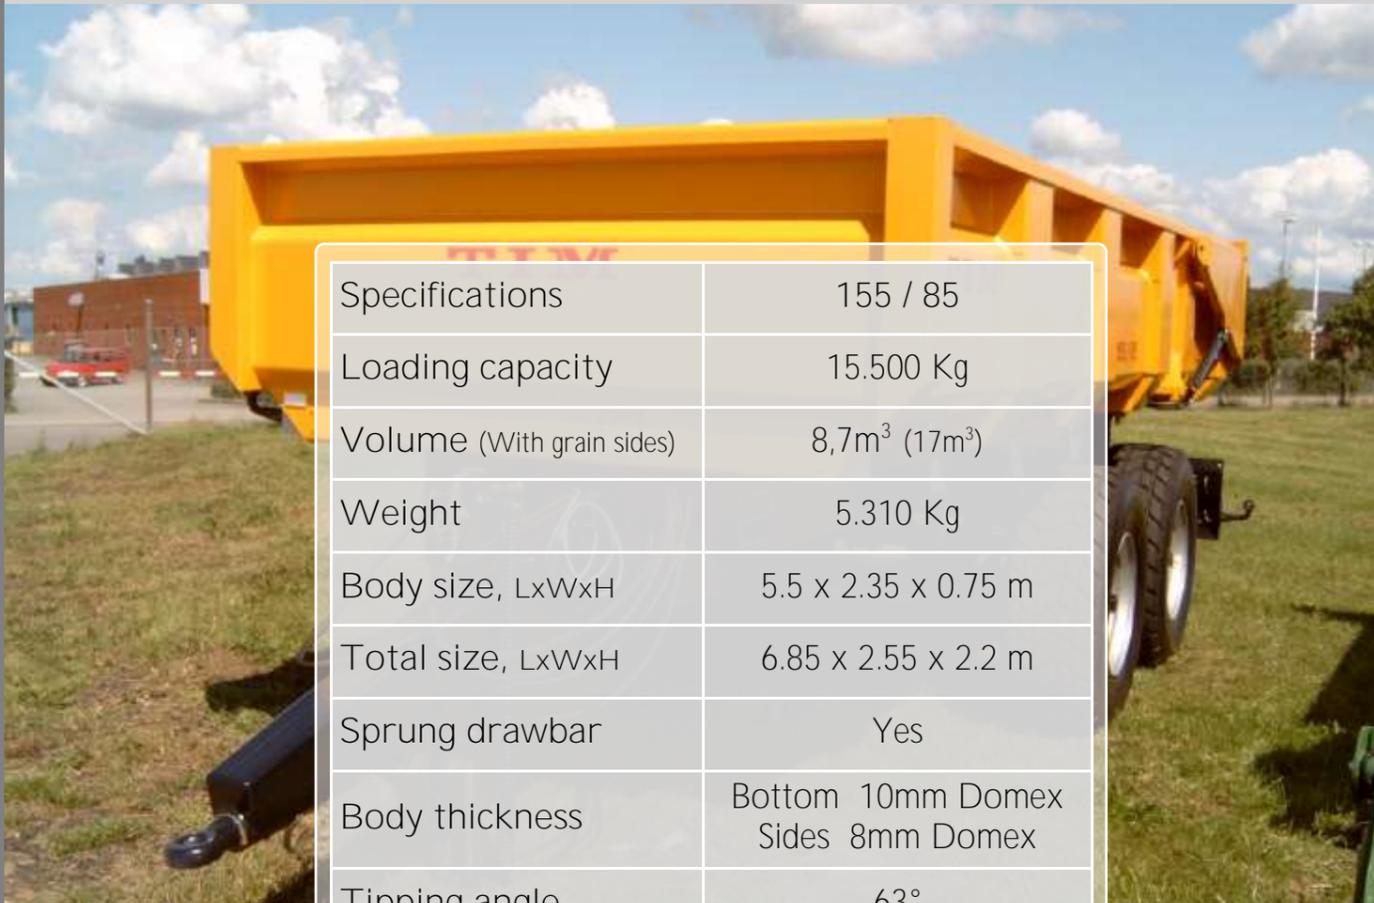

Thyregod A/S - Borgergade 46 - DK-7323 Give - Tlf. +45 7573 4099  
thyregod@thyregod.com - www.thyregod.com



155/85

# TIM - danish quality trailers..!

Thyregod has over the years developed and supplied a large trailer fleet to Danish and international customers.

They are all rooted same place as the well known TIM trailers, which has been among the strongest and most popular trailers on the market for many years.



## Strong durable trailers

The body has bevelled edges along the bottom, which eliminates the possible build-up of material. The 155/85 is equipped as standard with hydraulic "French" tailgate, the tailgate opens up high, which makes unloading of branches and rubble with rebar easy. As an option the smaller norwegian-type tailgate can be fitted.



## Strong bones

The trailer chassis are constructed in 6mm high-strength steel, which helps to provide the 155/85's well-known strength and durability.

Double tipping cylinders ensures enough tipping power, and with a angle of 63° unloading is made easy.

445/65-R22.5 tyres are standard, but wider tyres can be fitted.

## Smooth handling

The trailer is equipped with both a suspended bogie and drawbar, and with axle spacing of only 1350mm turning is made easy.

Strong ADR 110x110mm axles with brakes are standard and with 10 bolt hubs, fitting of wide tyres is easy.

Steering of the rear axle is also a possibility, both run along or controlled steering is an option.



## Travel in comfort

The height adjustable and suspended drawbar, relieves the trailer and the tractor from a lot of stress, both on the road and in the rough.

The 155/85 is equipped with a powerful double acting hydraulic jack, that makes parking the trailer easy, and also folds nicely out of the way.

The towing eye is bolted on, and a K80 ball hitch is available as an option.

## Multi usage

When transporting loose materials, the trailer can be fitted with 70cm extension sides, which will increase the volume to 16.7 m<sup>3</sup>.

Taillights, wobble, side marker and position lights are all LED type, which both have longer life, but also provides greater visibility when travelling on the road. Sturdy bumper that can swing in / out, if the bolt is removed.

